



Original size

**Corner radius R 1.1**

**Material**

Duroplastic

**Protection level**

IP 20/IP 21

IP 44 in connection with  
sealing gasket

**Permissible ambient operating  
temperature**

conventional devices: -15 °C ... +60 °C

electronic devices: -15 °C ... +45 °C

(Above +25 °C the connected load  
of dimmers needs to be reduced  
acc. to operating instructions.)

KNX devices: +5 °C ... +25 °C





**Colours**

white	similar RAL 9010
aluminium	lacquered
black	similar RAL 9005

**Selected devices available in**

blue	similar RAL 5013
green	similar RAL 6029
orange	similar RAL 2004
red	similar RAL 3003

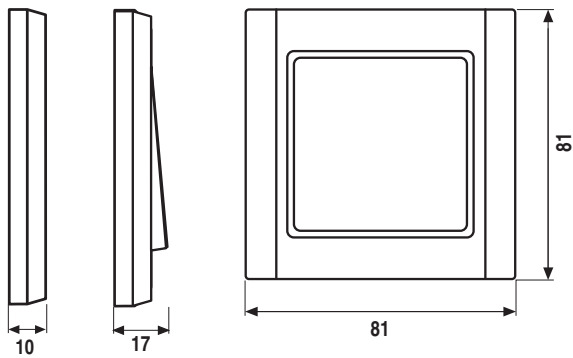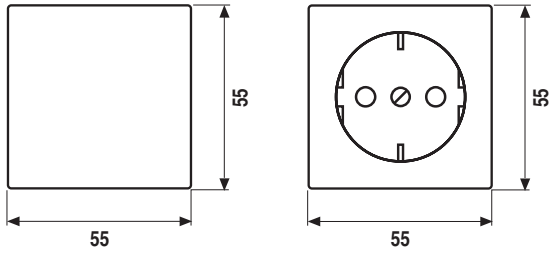

**Frame size**

- 1-gang 81 mm x 81 mm
- 2-gang 152 mm x 81 mm
- 3-gang 223 mm x 81 mm
- 4-gang 294 mm x 81 mm
- 5-gang 365 mm x 81 mm

Frames can be installed horizontally and vertically.

