



Original size

**Corner radius R 1.5**

**Material**

Duroplastic/Thermoplastic

**Protection level**

IP 20

**Permissible ambient operating temperature**

conventional devices: -15 °C ... +60 °C

electronic devices: -15 °C ... +45 °C

(Above +25 °C the connected load of dimmers needs to be reduced acc. to operating instructions.)

KNX devices: +5 °C ... +25 °C



**Colours**

aluminium/white with



chrome

aluminium

anthracite similar RAL 7016

yellow similar RAL 1028

blue similar RAL 5002

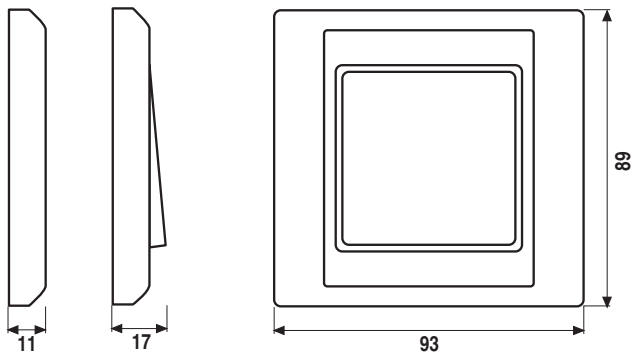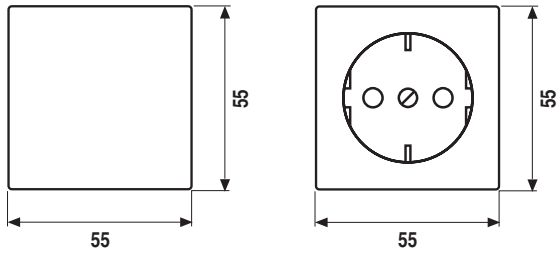

**Frame size**

1-gang	89 mm x 93 mm
2-gang	160 mm x 93 mm
3-gang	231 mm x 93 mm
4-gang	302 mm x 93 mm
5-gang	373 mm x 93 mm

Frames can be installed horizontally and vertically.

