



Original size

**Corner radius R 3.1**

**Material AS 500**

Duroplastic

**Material AS 500 antibacterial**  
antibacterial duroplastic

**Protection level**

IP 20/IP 21

IP 44 in connection with  
sealing gasket

**Permissible ambient operating  
temperature**

conventional devices: -15 °C ... +60 °C

electronic devices: -15 °C ... +45 °C

(Above +25 °C the connected load  
of dimmers needs to be reduced  
acc. to operating instructions.)

KNX devices: +5 °C ... +25 °C





**Colours**

ivory            similar RAL 1013  
white            similar RAL 9010

Selected devices available in

blue             similar RAL 5013  
green            similar RAL 6029  
orange          similar RAL 2004  
red                similar RAL 3003

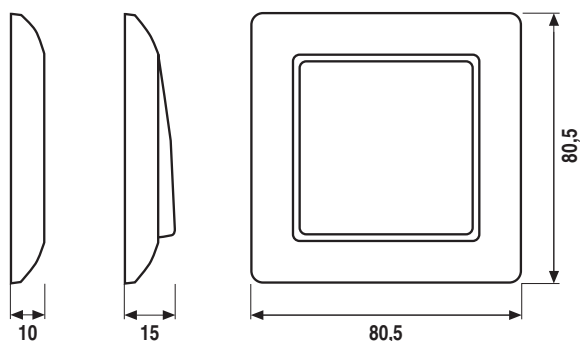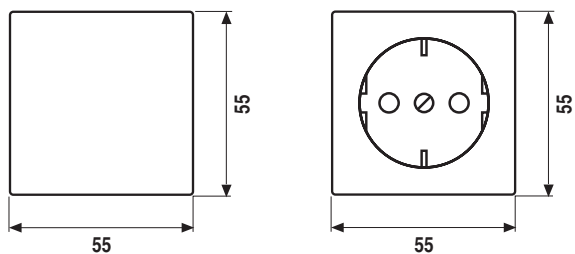

**Frame size**

- 1-gang 80.5 mm x 80.5 mm
- 2-gang 151.5 mm x 80.5 mm
- 3-gang 222.5 mm x 80.5 mm
- 4-gang 293.5 mm x 80.5 mm
- 5-gang 364.5 mm x 80.5 mm

Frames can be installed horizontally and vertically.

