



Original size



Corner radius R 3.1

Material

Thermoplastic

Protection level

IP 20/IP 21

IP 44 in connection with
sealing gasket

**Permissible ambient operating
temperature**

conventional devices: -15 °C ... +60 °C

electronic devices: -15 °C ... +45 °C

(Above +25 °C the connected load
of dimmers needs to be reduced
acc. to operating instructions.)

KNX devices: +5 °C ... +25 °C

Colours

ivory similar RAL 1013

white similar RAL 9010



Selected devices available in

blue similar RAL 5013

green similar RAL 6029

orange similar RAL 2004

red similar RAL 3003

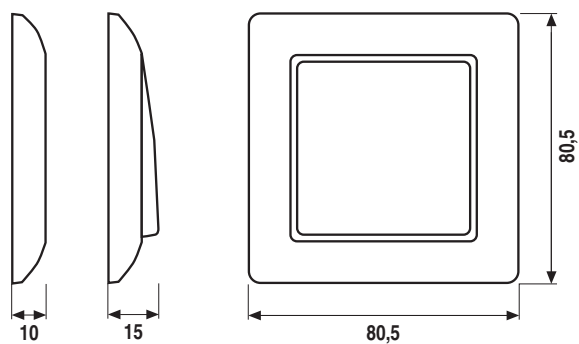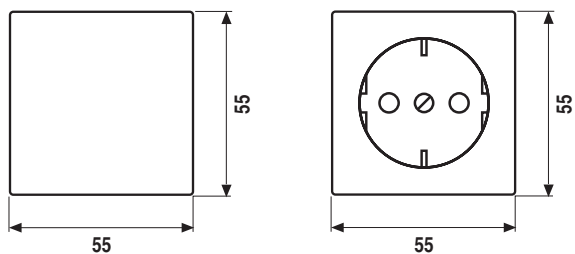

Frame size

- 1-gang 80.5 mm x 80.5 mm
- 2-gang 151.5 mm x 80.5 mm
- 3-gang 222.5 mm x 80.5 mm
- 4-gang 293.5 mm x 80.5 mm
- 5-gang 364.5 mm x 80.5 mm

Frames can be installed horizontally and vertically.

