



Original size

**Corner radius R 8.5**

**Material**  
Duroplastic

**Protection level**  
IP 20/IP 21  
IP 44 in connection with  
sealing gasket

**Permissible ambient operating temperature**  
conventional devices: -15 °C ... +60 °C  
electronic devices: -15 °C ... +45 °C  
(Above +25 °C the connected load  
of dimmers needs to be reduced  
acc. to operating instructions.)  
KNX devices: +5 °C ... +25 °C





**Colours**

ivory	similar RAL 1013
white	similar RAL 9010
light grey	similar RAL 7035
grey	similar RAL 7038
red	similar RAL 3003
brown	similar RAL 8022
blue	similar RAL 5013
black	similar RAL 9005

Selected devices available in  
orange similar RAL 2004  
green similar RAL 6029

**Metal versions**

gold-bronze  
platinum

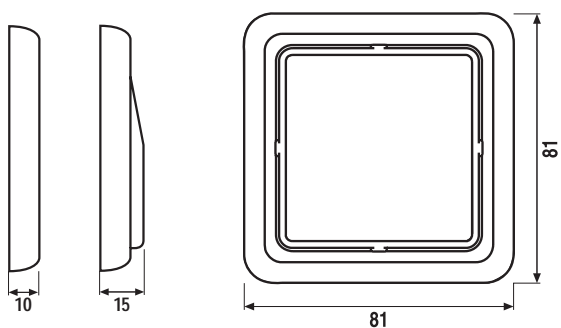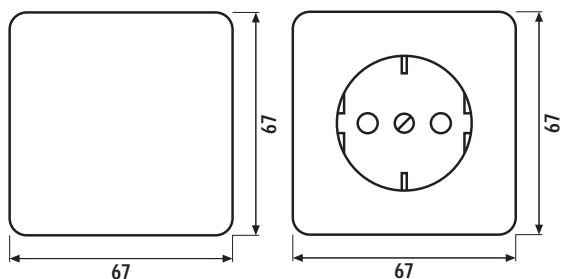

**Frame size**

1-gang	81 mm x 81 mm
2-gang	152 mm x 81 mm
3-gang	223 mm x 81 mm
4-gang	294 mm x 81 mm
5-gang	365 mm x 81 mm

Frames can be installed horizontally and vertically.

