



Original size



Corner radius R 8.5



Material
Thermoplastic

Protection level
IP 20/IP 21
IP 44 in connection with
sealing gasket

**Permissible ambient operating
temperature**
conventional devices: -15 °C ... +60 °C
electronic devices: -15 °C ... +45 °C
(Above +25 °C the connected load
of dimmers needs to be reduced
acc. to operating instructions.)
KNX devices: +5 °C ... +25 °C

Colours
ivory similar RAL 1013
white similar RAL 9010
light grey similar RAL 7035
grey similar RAL 7038
brown similar RAL 8022
black similar RAL 9005

Selected devices available in
green similar RAL 6029
orange similar RAL 2004

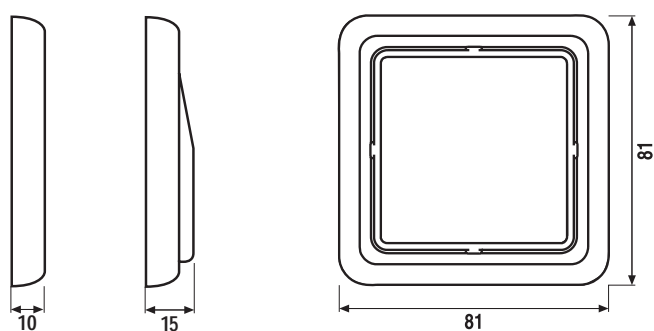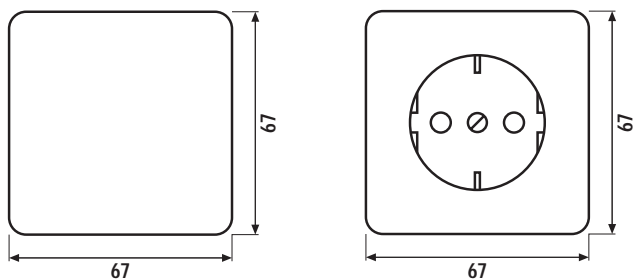

Frame size

1-gang	81 mm x 81 mm
2-gang	152 mm x 81 mm
3-gang	223 mm x 81 mm
4-gang	294 mm x 81 mm
5-gang	365 mm x 81 mm

Frames can be installed horizontally and vertically.

