

Original size



**Corner radius R 2**

**Material Duroplastic**

**Protection level**

IP 20/IP 21

IP 44 in connection with  
sealing gasket

**Permissible ambient operating  
temperature**

conventional devices: -15 °C ... +60 °C

electronic devices: -15 °C ... +45 °C

(Above +25 °C the connected load  
of dimmers needs to be reduced  
acc. to operating instructions.)

KNX devices: +5 °C ... +25 °C

**Colours**

ivory similar RAL 1013

white similar RAL 9010



light grey similar RAL 7035

black similar RAL 9005

Selected devices available in

green similar RAL 6029

orange similar RAL 2004

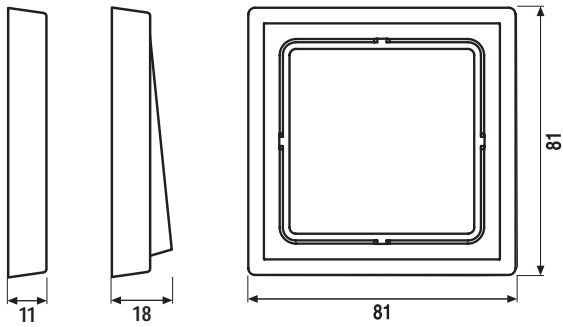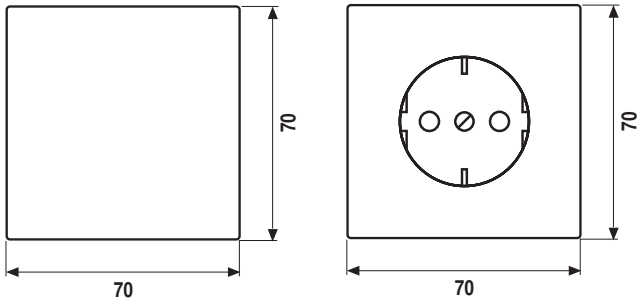

**Frame size**

1-gang	81 mm x 81 mm
2-gang	152 mm x 81 mm
3-gang	223 mm x 81 mm
4-gang	294 mm x 81 mm
5-gang	365 mm x 81 mm

Frames can be installed horizontally and vertically.

