

**Material**

Covers made of lacquered aluminium.

Frames made of acrylic glass embedded with lacquered or anodised aluminium.

Corner radius R 5

Protection level

IP 20/IP 21

Permissible ambient operating temperature

conventional devices: 0 °C ... +60 °C

electronic devices: 0 °C ... +45 °C

(Above +25 °C the connected load of dimmers needs to be reduced acc. to operating instructions.)



KNX devices: +5 °C ... +25 °C

Colours

white

gold-bronze

silver-black

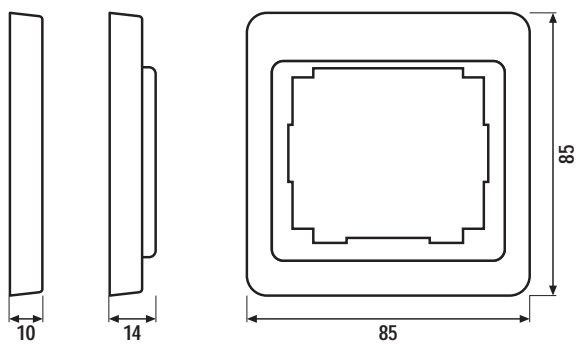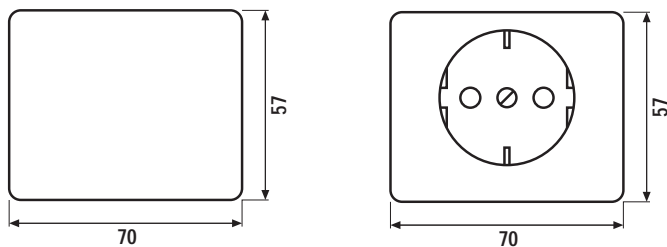

Frame size

1-gang	85 mm x 85 mm
2-gang	156 mm x 85 mm
3-gang	227 mm x 85 mm
4-gang	298 mm x 85 mm
5-gang	369 mm x 85 mm

Different frames for vertical and horizontal installation.

